
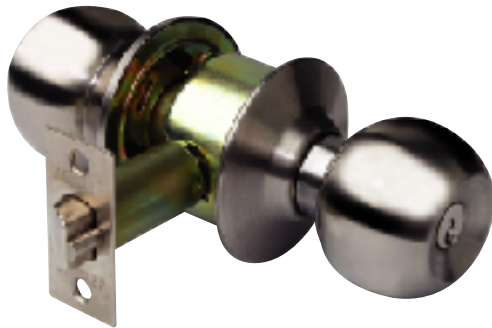


3200 Series Cylindrical Lock



RP01
Rebated part to suit
cylindrical lock

Specifications




Mechanism

Heavy gauge cold rolled steel, zinc plated and dichromated for rust resistance.


Material

Roses are stainless steel, installed over wrought steel mounting plates. Knobs are stainless steel secured by steel knob retainers which cannot be depressed when the lock has been locked. Latch bolt and Front Plate are steel.

- Handing** : Completely Reversible
- Door Thickness** : 35mm to 50mm
- Backset** : 70mm standard, 60mm available upon request
- Cylinder** : 5 pin mechanism
- Finishes** : Satin Stainless Steel (SS), other finishes available upon request
- Standard** : Equivalent ANSI Grade 3

Function	Cat. No	Operations
Entrance	3201SS 	Latch is operated by both knobs except when inside button is activated to lock outside knob. The key unlocks push button and unlocks both knobs.
Privacy / Bathroom	3202SS 	By both knob. Push button in side knob locks outside knob. Turning inside knob or closing door releases button. Emergency opening from outside by screwdriver or similar objects.
Passage	3203SS 	Opened by either knob at all times.

3800 Series Cylindrical Lock



RP01
Rebated part to suit
cylindrical lock

Specifications

Mechanism









Heavy gauge cold rolled steel, zinc plated and dichromated for rust resistance.

Material

Roses are stainless steel, installed over wrought steel mounting plates. Knobs are stainless steel secured by steel knob retainers which cannot be depressed when the lock has been locked. Latch bolt and Front Plate are stainless steel.

Handing	: Reversible
Door Thickness	: 35mm to 45mm
Backset	: 70mm standard
Cylinder	: 6 pin tumbler mechanisms
Standard	: ANSI Grade 2
Finishes <input type="checkbox"/>	: Satin Stainless Steel SSS Antique Brass AB Antique Copper AC


3800 Series Cylindrical Lock

Function	Cat. No	Operations
Entrance	3801SS 	Latch is operated by both knobs except when inside button is activated to lock outside knob. The key unlocks push button and unlocks both knobs.
Privacy	3802SS 	By both knob. Push bottom in side knob locks outside knob. Turning inside knob or closing door releases button. Emergency opening from outside by screwdriver or similar objects.
Passage	3803SS 	Opened by either knob at all times.
Patio	3804SS 	Outside knob locked by push button in inside knob. Rotating inside knob or closing door releases (kicks off) push button and unlocks outside knob.
Storeroom	3805SS 	Outside knob always rigid. Opened by key from outside. Inside knob always free.
Classroom	3806SS 	Key locks or unlocks outside knob. Opened by inside knob at all times.
Double Cylinder	3807SS 	Cylinder both sides. Key from either side locks or unlocks both knobs.
Connecting	3808SS 	Key locks or unlocks inside knob. Blank plate outside.

ML8000 Series Mortise Lock

Specifications

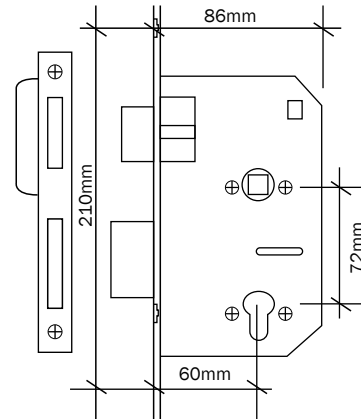- Stainless steel latchbolt for fire resistance up to 2 hours
- Stainless steel deadbolt for increased resistance to vandalism
- Stainless steel follower for increased resistance to vandalism and heavy duty usage
- Reversible latch for left or right handed doors
- Stainless steel forend
- 72mm centers and 60mm backset (85mm centers on request)
- Universal strike plate for left or right handed doors



d key to your security



ML8001-60SS ENTRANCE

Inside

Lever handle retracts latch bolt. Deadbolt is operated by cylinder key or cylinder thumbturn.

Outside

Deadbolt is operated by cylinder key. Key also retracts latch bolt.



ML8003-60SS-FR PASSAGE



Inside

Exit always free; lever handle retracts latch bolt.

Outside

Entry always free; lever handle retracts latch bolt.



ML8002-60SS PRIVACY

Inside

Lever handle retracts latchbolt. WC thumbturn operates deadbolt.

Outside

Lever handle retracts latch bolt. Emergency release feature by coin or screwdriver retracts deadbolt.



ML8004-60SS DEADBOLT

Inside

Locked or opened cylinder key or thumbturn.

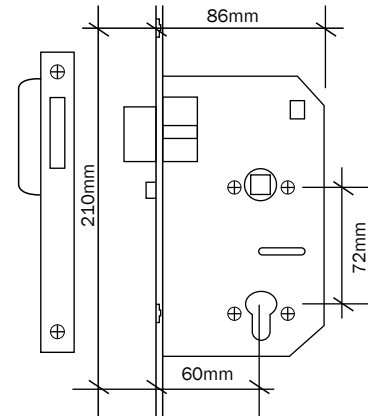
Outside

Deadbolt is operated by cylinder key.

ML8000 Series Mortise Lock

Specifications

Stainless steel latchbolt for fire resistance up to 4 hours
 Stainless steel follower for increased resistance to vandalism and heavy duty usage
 Reversible latch for left or right handed doors
 Stainless steel forend
 72mm centers and 60mm backset (85mm centers on request)
 Universal strike plate for left or right handed doors



ML8005-60SS-FR 
STOREROOM

Inside

Exit always free; lever handle automatically retracts latch bolt.

Outside

Opened by key only. Handle always rigid.



ML8006-60SS-FR 
CLASSROOM

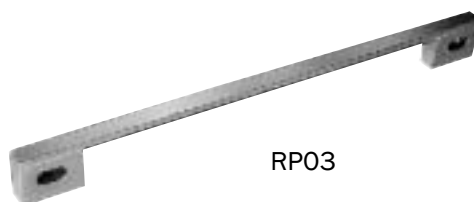
Inside

Exit always free; lever handle retracts latch bolt except when handle is made inoperative by key from outside or thumbturn from inside.

Outside

Entry always free except when handle is made inoperative by key from outside or by thumbturn from inside.

Rebated Part to Suit Mortise Lock



RP03

MC600 Series Cylinder (Euro profile)

Specifications

Mechanism : 10 pin tumbler mechanism with MX9 restricted keyway
Length : 33mm x 33mm
Finish : Nickel, Polished Brass
Security : High

	MC601-MX9 SINGLE CYLINDER
	MC602-MX9 KEY AND THUMBTURN CYLINDER
	MC603-MX9 DOUBLE CYLINDER
	MC604 PRIVACY CYLINDER
	MC605 THUMBTURN ONLY