



■ ***Panic Exit Hardware*** ■

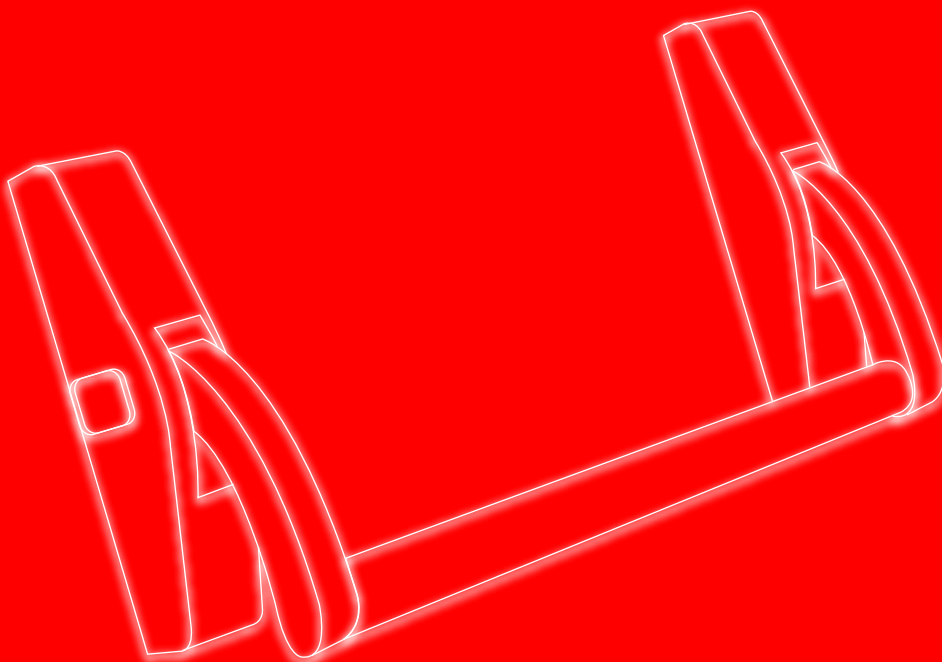

PED3000 & 7000 Rim Type and Fire Exit Device

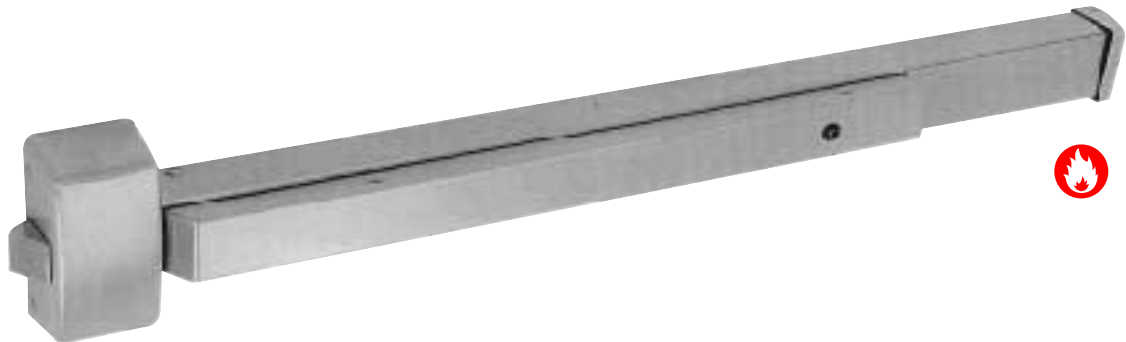

Specifications

For Doors	: 1 ³ / ₄ " thick standard optional 2 ¹ / ₂ " thick. 4 ¹ / ₂ " minimum stile width required for single or double door application using standard 239 strike and pull or lever trims.
Chassis	: Nonferrous alloy (Panic Grade), steel (Fire Grade).
Cover	: Nonferrous alloy. Cover stock hollow metal doors with 161 cutout.
Mounting	: Furnished standard with wood and machine screws. Available with the bolts on request
End Cap	: Steel construction.
Alarm	: Available.
Hand	: Non handed, centre hub.
Latch Bolt	: Stainless steel ³ / ₄ " throw.
Spring	: Stainless steel throughout.
ANSI Standard	: A156.3, Grade 1.
Rail Assembly	: Heavy gauge steel, painted.
Strike	: 239 packed standard
Dogging Feature	: Allen-type key furnished standard on non-fire labeled devices. Cylinder dogging available
Mullion	: Available
UL and ULC Listed	: 3000 series for panic. 7000 series for fire exit hardware for all types of 4' x 8' single doors and 8' x 8' double doors for up to 3 hours fire labeled installations, conforms to standards UL 10C and UBC 7-2-1997 codes.
Finish	: Alum/Duro/Gold.
Door Size	: 32" / 36" / 48".

Dimensions

Touchbar height to finish floor	: 41"(1043mm) at centre
Touchbar projection	
neutral	: 2 ¹ / ₂ "(64mm)
depressed	: 1 ³ / ₄ "(45mm)
Centre Case	: 5 ¹ / ₈ " x 2 ³ / ₄ " x 2 (129mm x 69mm x 52mm)
Device Length - Short 3' (914mm)	: 2'9" x 3' (840mm to 914mm) door size
- Long 4' (1219mm)	: 2'9" x 4' (1145mm to 1219mm) door size

PED3100 & 7100 Vertical Rod Type and Fire Exit Device



Specifications


- For Doors** : 1³/₄" thick standard optional 2¹/₂" thick. 4¹/₂" minimum stile width required for single or double door application using standard 239 strike and pull or lever trims.
- Chassis** : Nonferrous alloy (Panic Grade), steel (Fire Grade).
- Cover** : Nonferrous alloy. Cover stock hollow metal doors with 161 cutout.
- Mounting** : Furnished standard with wood and machine screws. Available with the bolts on request
- End Cap** : Steel construction.
- Alarm** : Available. Prefix "Alarm" before part#.
- Hand** : Easy field reversible. Specify at time of order LHRB, RHRB for convenience.
- UL and ULC Listed** : 3100 series for panic. 7100 series for all types of 8' x 8' double doors for up to 3 hours fire labeled installations, conforms to standards UL 10C and UBC 7-2-1997 codes.
- Dogging Feature** : Allen-type key furnished standard on non-fire labeled devices.
- Finish** : Aluminum(alum), dark bronze duranodic(duro), gold
- Rail Assembly** : Heavy gauge steel, painted.
- ANSI Standard** : A156.3, Grade 1.
- Strike** : 239 packed standard
- Door Size** : 36" x 84" / 48" x 96" / 36" x 96" doors.

Dimensions

- Touchbar height to finished floor** : 41"(1043mm) at centre
- Touchbar projection**
- neutral : 2¹/₂"(64mm)
 - depressed : 1³/₄"(45mm)
- Centre Case** : 5¹/₈" x 2³/₄" x 2 (129mm x 69mm x 52mm)
- Device Length - Short 3' (914mm)** : 2'9" x 3' (840mm to 914mm) door size
- Long 4' (1219mm)** : 2'9" x 4' (1145mm to 91219mm) door size
- Panic grade top & bottom latch case** : 5¹⁵/₁₆" x 2¹/₈" x 1³/₈" (100mm x 52mm x 42mm)
- Fire grade top latch case** : 5¹⁵/₁₆" x 2¹¹/₁₆" x 1¹/₁₆" (100mm x 68mm x 53mm)
- Fire grade & bottom latch case** : 5¹⁵/₁₆" x 2¹/₈" x 1³/₈" (100mm x 52mm x 42mm)
- Top & bottom rod length 36" x 84" doors** : Top rod 43¹/₄"(1100mm), bottom rod 37³/₄"(960mm)
- Top & bottom rod length 48" x 96" doors** : Top rod 53¹/₁₆"(1350mm), bottom rod 37³/₄"(960mm)
- Vertical rods** : 1/2"(13mm) Round tubing



PED3000 & 8000 Series Lever Trim Design

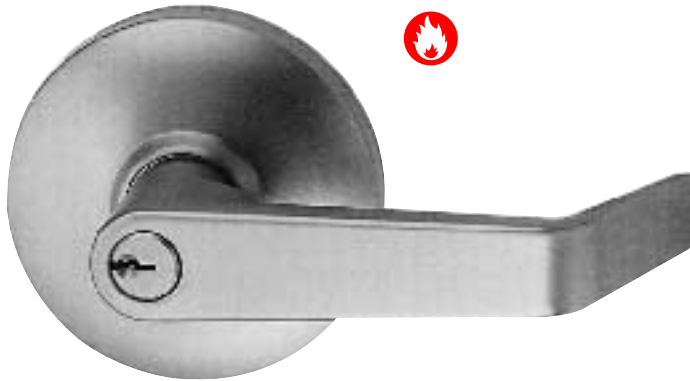

Non Handed Grade 1

Cylindrical body hardened steel heavy duty tailpiece. For 1³/₄" and 2¹/₄" doors. Available for fire and non fire rated rim and vertical rod exit devices. Rose diameter 3³/₄", lever length 4³/₄". Fits and covers 161 cutout.

Finishes: US26D, US10B, US3, US4.


8000L Entrance: Key retracts latchbolt, unlock lever.

ANSI Function - 08/13

Keyway

Standard 6-pin "C" keyway.

Pull trims for the small head exit device

#3000NL

Outside by pull and key
03/04 Function

Functions

Trim is furnished with 3 mortise nuts and screws for 1 door standard. Also available for up to 2 door.

Design trim will cover a 161 cutout. If cylinder operation is required without trim, or only cylinder.

Finishes: Alum/Duro/Gold